# (19) World Intellectual Property Organization

International Bureau



# 

#### (43) International Publication Date 21 April 2005 (21.04.2005)

**PCT** 

### (10) International Publication Number WO 2005/036077 A1

(51) International Patent Classification7:

F25D 23/12

(21) International Application Number:

PCT/JP2004/014997

- (22) International Filing Date: 5 October 2004 (05.10.2004)
- (25) Filing Language:

English

(26) Publication Language:

English

JP

(30) Priority Data:

2003-351023 2003-350931

9 October 2003 (09.10.2003) 9 October 2003 (09.10.2003)

2003-350533

ЛР 9 October 2003 (09.10.2003)

- (71) Applicant (for all designated States except US): MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).
- (72) Inventor; and

(75) Inventor/Applicant (for US only): HIMORI, Nobuaki.


- (74) Agents: IWAHASHI, Fumio et al.; c/o Matsushita Electric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Published:

with international search report

[Continued on next page]

(54) Title: REFRIGERATOR

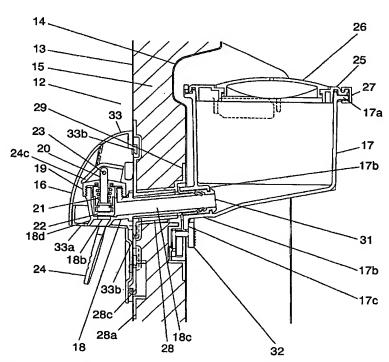

(57) Abstract: A refrigerator includes water storage tank (17) disposed at a higher place inside the door, water feeder (16) placed on a front face of the door, and water feeding tube (18) coupling tank (17) to feeder (16). Tube (18) slants upward from water feeder (16) to storage tank (17).

# WO 2005/036077 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.